

# self-clamping screwless wire CONNECTORS

# MINI




Compact size suits tight spaces




Ergonomic design for easy and quick installation



Copper current path

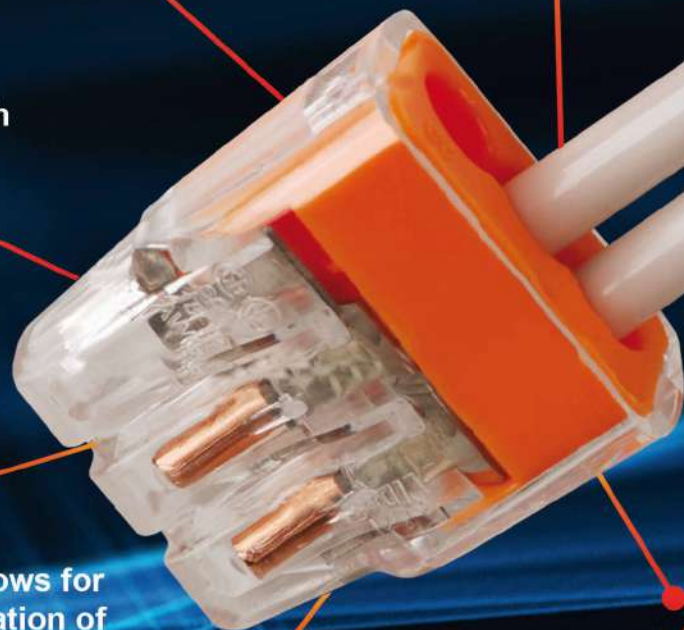

Clear shell allows for optical verification of the connection




Stainless steel clamp



Color coded for easy identification

# self-clamping screwless wire CONNECTORS MINI



PC212S



PC213S



PC214S



PC215S



PC218S



Cat. No	89 240 000	89 241 000	89 242 000	89 243 000	89 244 000
Material	polycarbonate, stainless steel, tinned copper	polycarbonate, stainless steel, tinned copper	polycarbonate, stainless steel, tinned copper	polycarbonate, stainless steel, tinned copper	polycarbonate, stainless steel, tinned copper
Nominal cross-section	0,2 - 2,5 mm <sup>2</sup>	0,2 - 2,5 mm <sup>2</sup>	0,2 - 2,5 mm <sup>2</sup>	0,2 - 2,5 mm <sup>2</sup>	0,2 - 2,5 mm <sup>2</sup>
Cable type	solid wire	solid wire	solid wire	solid wire	solid wire
Working temperature	up to 85°C	up to 85°C	up to 85°C	up to 85°C	up to 85°C
Voltage rating	450 V	450 V	450 V	450 V	450 V
Rated current	24 A	24 A	24 A	24 A	24 A
Dimensions A/B/C [mm]	10 / 17.3 / 6.16	14 / 17.3 / 6.16	18 / 17.3 / 6.16	22 / 17.3 / 6.16	18 / 16 / 10.8
Weight	0.76 g	1 g	1.34 g	1.64 g	2.19 g
Length of uninsulated wire	11 mm	11 mm	11 mm	11 mm	11 mm
Bulk pack					
Standards					

Wydanie: sierpień 2022



SIMET S.A.  
Al. Jana Pawła II 33  
58-506 Jelenia Góra  
Tel. +48 75 64 71 492  
www.simet.com.pl