

Compatible with the following junction boxes



MOUNTING
RING
PM-85

S60KF



S60DF




S60GF



Z60DF



S60K



S60D



S60G



Z60D



Product film

SIMET S.A.
Al. Jana Pawła II nr 33
58-506 Jelenia Góra
tel: 75 64 71 492
www.simet.com.pl
export@simet.com.pl

Find us on:
 SIMET S.A. SIMET S.A.

October 2022

FASTRING


MOUNTING RING PM-85

TECHNICAL DATA

- Dimensions:
Ø outer: 88 mm
Ø inner: 62,8 mm
- Material: PP
- Heat resistance: 650 °C
- Installed with the use of a hole saw Ø 85 mm

ADVANTAGES


- Can be installed at temperatures below 0 °C
- Selection of the junction box embedding depth
- No need to use mortar or glue
- Stable and strong junction box embedding
- Quick and easy installation
- Savings in terms of time and costs
- Installation of the mounting ring on combined junction boxes

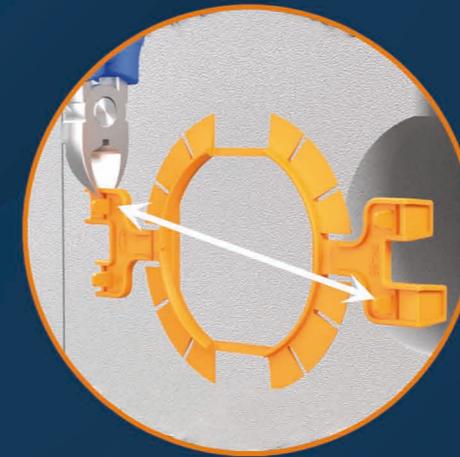


By cutting of the holders diagonally
choose junction box embedding depth




Mounting ring installation on „click”

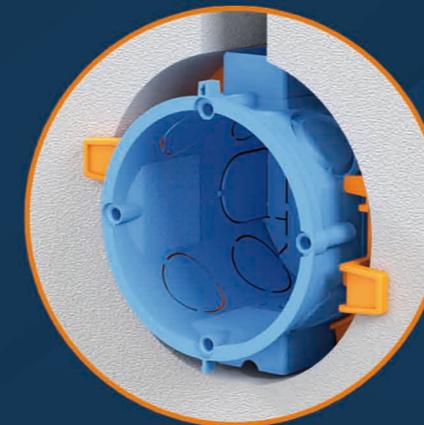

Stable support of the junction
box in the mounting hole

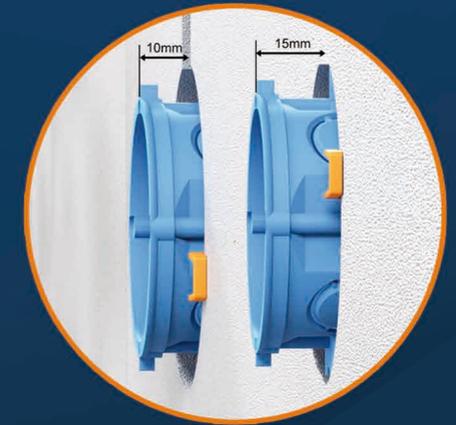

Selection of the junction
box embedding depth:
10 mm; 15 mm
Range:
0 - 20 mm

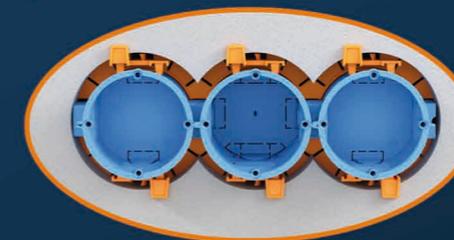

Horizontal embedding
of the junction boxes



Vertical embedding
of the junction boxes

FASTRING

Cat. no.: 37422008