


SBB
16 FS
086105-x-4

IEC 60947-7-1


690 V AC
Cu 114 A



Wejście / Incoming

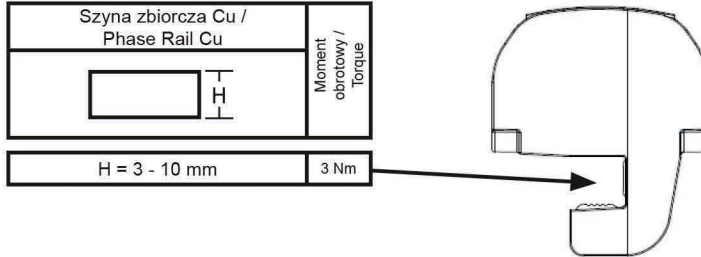

Wyjście / Outgoing

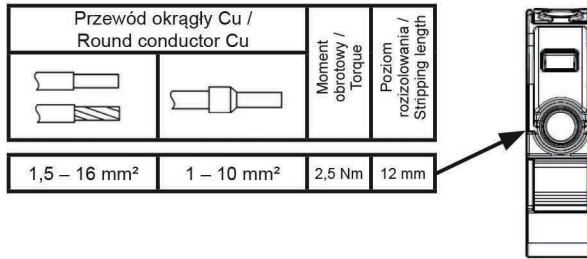

Dopuszczalne wymiary szyny zbiorczej / Wyjście
Approved phase rails dimensions / Outgoing

	Grubość szyny / busbar strength						
	3 mm		4 mm		5 mm		10 mm
E-Cu, niepowlekania / blank (Szerokość w mm / Width in mm)	-	-	12	-	12, 15, 20, 25, 30, 40, 50, 60, 63, 80, 100, 125	-	12, 15, 20, 30, 40, 50, 60, 80, 100, 120, 160, 200
E-Cu, cynowana / tin-plated (Szerokość w mm / width in mm)	10	-	-	-	12, 15, 20, 25, 30	-	12, 20, 30, 40, 50, 60, 80, 100, 120
Prąd znamionowy / Nominal current	76 A	76 A	76 A	114 A	76 A	114 A	76 A 114 A
Wyjście / Outgoing (Maks. przekrój / Cross section)	1 x 16mm ²	1 x 16 mm ²	2 x 10 mm ²	1 x 16 mm ²	2 x 10 mm ²	1 x 16 mm ²	2 x 10 mm ²